



- ✓ Small size and light weight
- ✓ Useful for working in coal mining, construction of tunnels, demolition of concrete, industry...



Weight: 18 lb



Piston: 1.46"



Stroke: 3.75"



Impacts/min: 1.250



Consumption 73 PSI: 32cfm



Pressure: 73 PSI



**Chuck for shank: Ø 29/32" x 15/32"
Ø 29/32" x 3/4"**



Air hose: 3/4"



WARNING

Operation: Never add only oil.
Add a plug of 20 x 20 mm from a mixture of
75% of gasoline + 25% of oil
by the air inlet fitting


T-8

Minimum maintenance
with maximum profitability

PICK HAMMER



- 1 10107303 HANDLE
- 2 10400504 GUIDE BUSHING
- 3 10501104 VALVE PUSHER
- 4 10800004 BALL ADMISSION VALVE
- 5 10700003 PUSH SPRING OF THE BALL
- 6 10601104 3/4" CONNECTION NIPPLE
- 7 10300004 TRIGGER PIN
- 8 10201104 TRIGGER
- 9 20400004 FIXING WASHER
- 10 20204104 UPPER DISTRIBUTION PART
- 11 20108404 VALVE
- 12 20304104 LOWER DISTRIBUTION PART
- 13 40501154 ALIGMENT ROD
- 14 40205104 PISTON
- 15 40104114 CYLINDER
- 16 60310004 CYLINDER RUBBER WASHER
- 17 60104104 PICKHOLDER
- 18 811180M MUFFLER

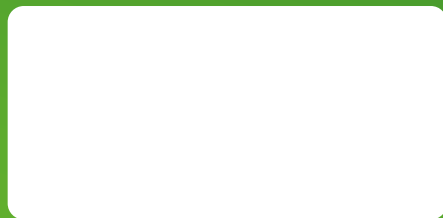

GRUPO ELCORO
1892-2017

Elcoro Decoletaje S.L.
Hammers division

Tel.: +34 943 78 80 02

topac@elcoro.com

www.topac.es